

Recessed wall led light

LUCEVERA®
Italy

Product Code

Family code	0105
Order code	LV-LVR0105-BB2WIP6527KASD

Technical data

Mounting	Recessed
Installation Position	Wall
Light Source	LED
Consumption	2W
LED Source lumens	80 Lm
Delivered lumens	58 Lm
Luminaire luminous efficiency	40 Lm/W
Colour temperature	2700K
Colour rendering index index ty	Ra≥90
Beam angle (At 50% of Imax)	Asymmetric
LED power supply unit	AC220V
Warranty	5 Years
Life Span	50 000 Hrs

Surface Finishing

Material	Aluminium
Body Colour	Gray
Reflector Colour	/


Optical and Visual Confort

Optical Type	Lens
SDCM	≤3
Light Distribution Symmetry	Asymmetric
Optical cover material	PC

Product Image



Dimensions

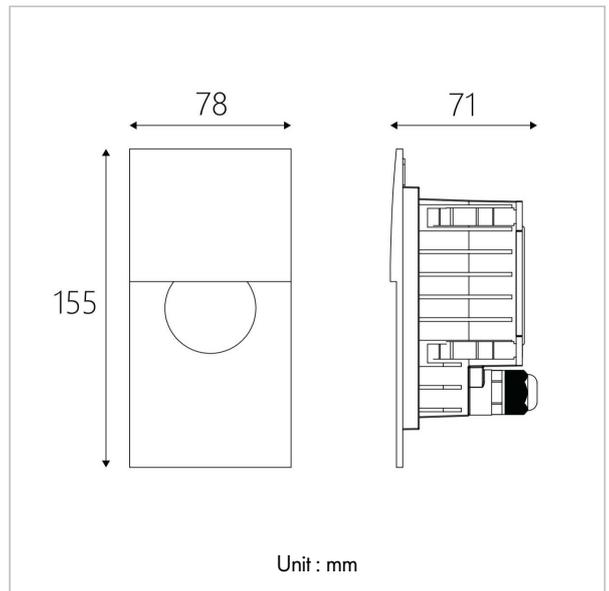

Lucevera reserves the right to change product specifications and availability without prior notice. All technical data, images, and descriptions are indicative and non-binding. Lucevera is not liable for errors in texts, illustrations, or translations. Measured values may vary within a $\pm 10\%$ tolerance for luminous flux, CCT, and power.



SCAN ME

Recessed wall led light

LED

LED brand	OSRAM
LED Model Type.	COB

Driver

Driver brand	OSRAM
THD	≤ 20%
Driver output	/
Driver efficiency	>85%
Power Factor	> 0.93
Dimming	Dali

Safety and Compliance

Protection class IP	IP65
Impact Protection	IK06
Installation Environment	Outdoor/Indoor
Safety	CLASS I
Ambient temperature	-40 +55° C

Product simulation



Light distribution

